



TO-220AB
TSR / & 7



ITO-220AB
TSR / & 7)





Features


- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDYGWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &RPSOLDQW

RATINGS AND CHARACTERISTICS CURVES


f & X Q O H V Q R W K B U Z L V H

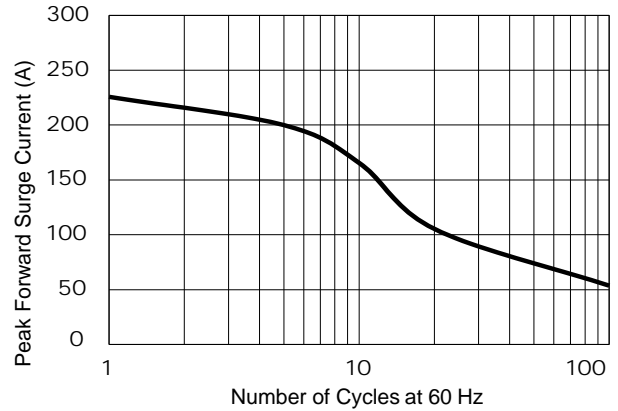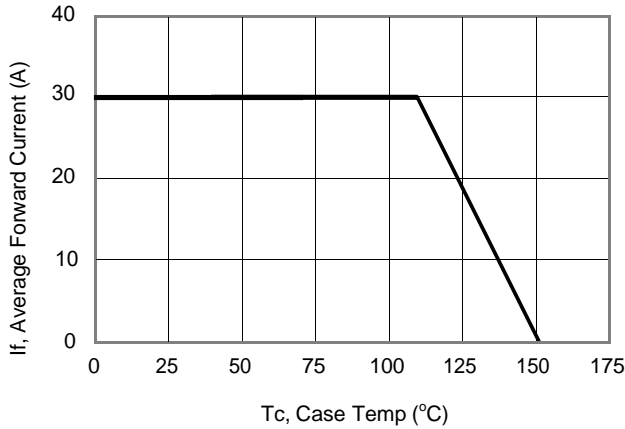


Current Derating, Case

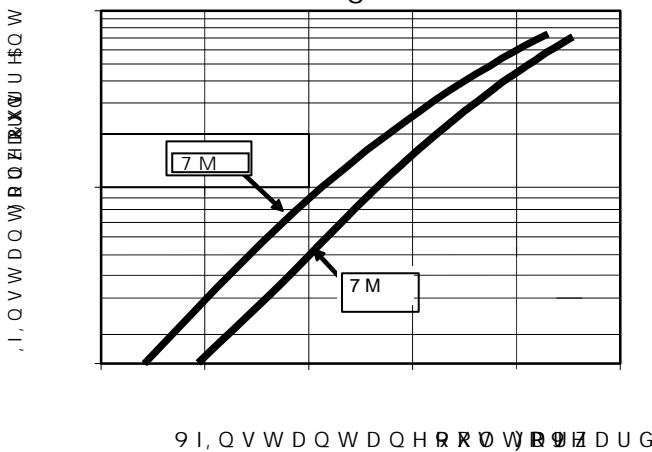

Maximum Repetitive Surge Current

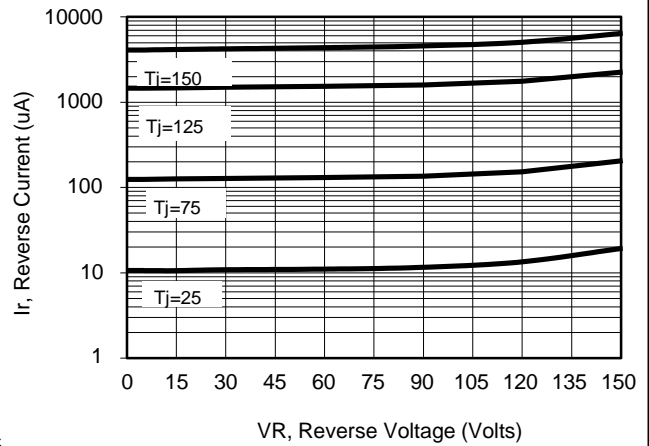


Typical Junction Capacitance

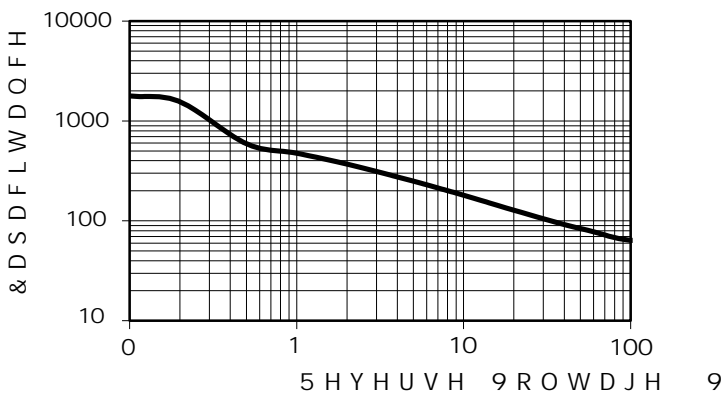


Typical Reverse Current


01180138
PACKAGE OUTLINE DIMENSIONS

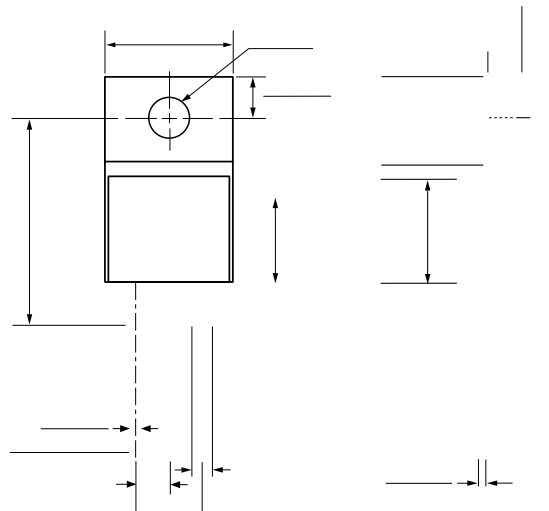

Marking Information

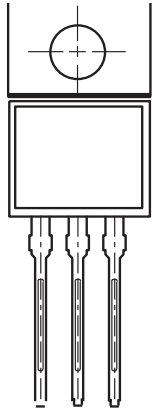


3URGXFW 765 GHQ & 7RU 76/5 & 7)
3' & LQIRUPDWLRQ

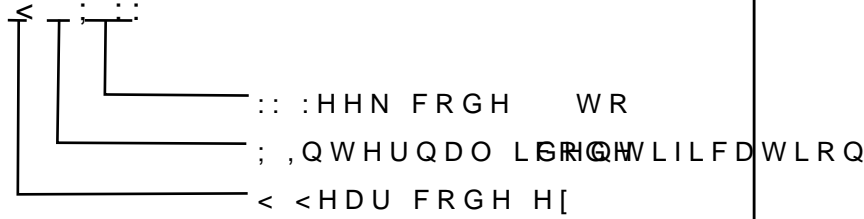

Packaging Information

7XEH 'LPHQVLRQV

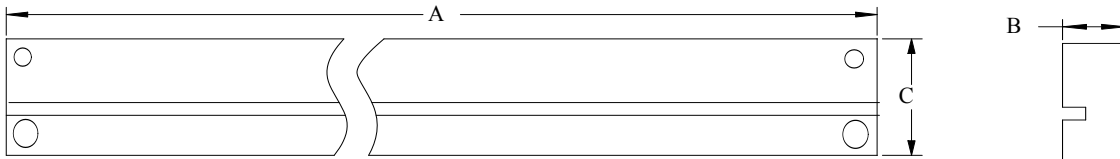

,QVLGH %R[

2XWVLGH %R[

Packaging Information

12	81,	7XEH 'LPHQVLRQV			,QVLGH %R[2XWVLGH %R[
6LH	PP	\$	%	&	/	:	+	/	:	+
47<	3&6	3&6 7XEH			6PDO SHFWDJH3&6 WXE VRWDO			3&6 FDUERGLWRWDO		
1RWH		7ROHUDQFH PP" PP			PP" PP			PP" PP		