

Features

DO-201AD

TSA /



Applications

Cathode  Anode

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

		()		
		()		
		()		





() %

() ≡




76\$ /

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

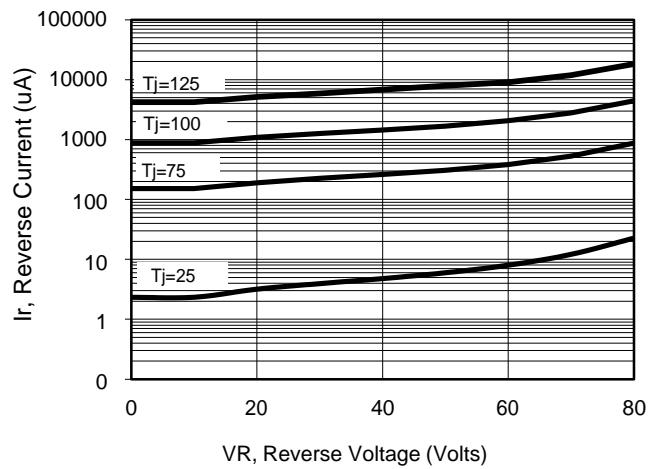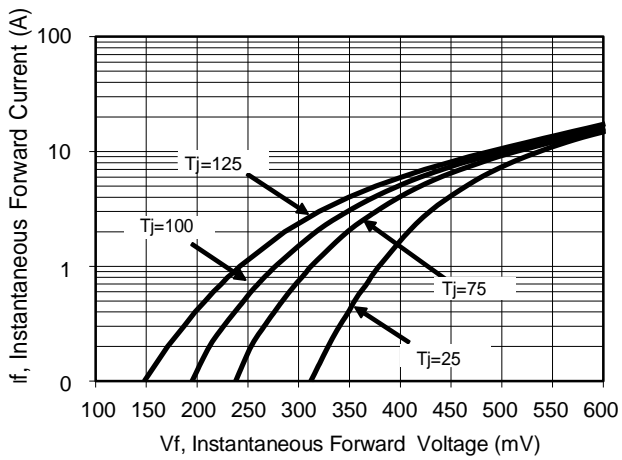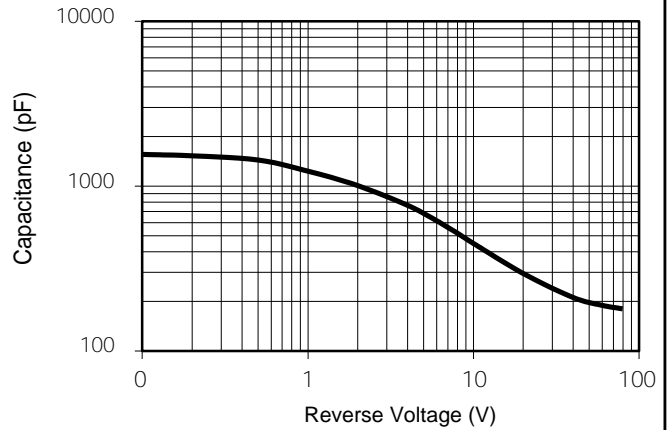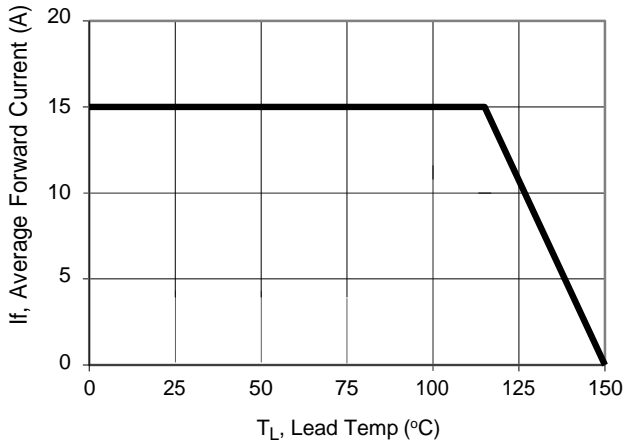

PACKAGE OUTLINE DIMENSIONS

DO-201AD

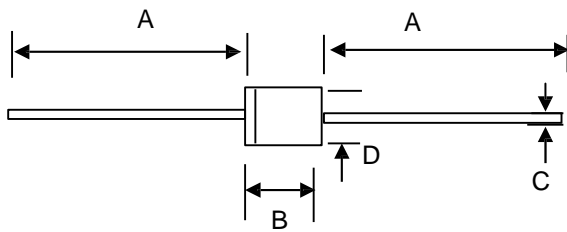



				C	
				1.4	
				1.1	
				5.1	



76\$ /





Product Trade IL 80

PDC information

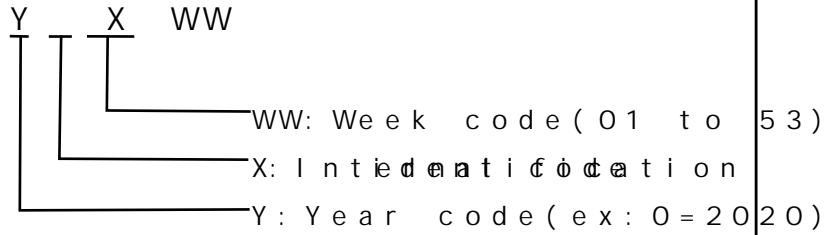

Inside Box

2" Outside Box



DUW_U[in] InZofaUtion

BO	IBI	Inside Box			Outside Box		
		@%	K%	< %	@2	K2	< 2
Gi ne a a		255	75	15	415	280	30
E H M	D 7 G	Ga U` d V g h u p y z 7 G # W U f h c b o o D 7 G # W U V t c k y d u`			1000 D 7 G # W U V t c k y d u`		
B c h Y H c` Y f U b` W Y a z a a /		2 11!0a0a z a a /			1!05100 z 1a0a		